

Iluminación General



► Gama profesional de alto rendimiento.


► Professional range of high performance.

YLD-9W-CH



Cromo

Datos
Técnicos



AC 200V 240V Hz 50/60 IP 20 CRI(Ra) >80

25.000h CE RoHS COMPLIANT ON/OFF x15.000

9W lm 720

24° 60° 3000K 4000K


Driver externo Clase 2

YLD-12W-CH



Cromo

Datos
Técnicos



AC 200V 240V Hz 50/60 IP 20 CRI(Ra) >80

25.000h CE RoHS COMPLIANT ON/OFF x15.000

12W lm 960

24° 60° 3000K 4000K

Driver externo Clase 2

YLD-GU10-5W-CH




Gama de Colores



Cromo

YLD-GU10-5W-W
(Blanco)

Datos Técnicos



AC 200V 240V Hz 50/60 IP 20 CRI(Ra) >80

25.000h CE RoHS COMPLIANT ON/OFF x15.000

5W Im 400 60°


3000K 4000K

YLD-MR16-5W-W



Blanco

Datos Técnicos



AC 12V Hz 50/60 IP 20 CRI(Ra) >80

25.000h CE RoHS COMPLIANT ON/OFF x15.000

5W Im 400 60°

3000K 4000K


YLD-GU10-PA2-7W

serie Standard



Blanco

Datos Técnicos



AC 200V 240V Hz 50/60 IP 20 CRI(Ra) >80

25.000h CE RoHS COMPLIANT ON/OFF x15.000

7W Im 560 60°

3000K 4000K 6000K

YLD-GU10-7W-CH




Gama de Colores



YLD-GU10-7W-W (Blanco) YLD-GU10-7W-BK (Negro) YLD-GU10-7W-G (Dorado)

Datos Técnicos



AC 200V 240V Hz 50/60 IP 20 CRI(Ra) >80

25.000h CE RoHS COMPLIANT ON/OFF x15.000

7W Im 560 60°

3000K 4000K 6000K


Versión solo CH (Cromo)

YLD-GU10-7W-CH 24°



Cromo

Datos Técnicos



AC 200V 240V Hz 50/60 IP 20 CRI(Ra) >80

25.000h CE RoHS COMPLIANT ON/OFF x15.000

7W Im 560 24°

3000K 4000K


YLD-GU10-7W-CH-D

DIMABLE



Cromo

Datos Técnicos



AC 200V 240V Hz 50/60 IP 20 CRI(Ra) >80

25.000h CE RoHS COMPLIANT ON/OFF x15.000

7W Im 560 60°

3000K 4000K

tubos LED



- ▶ Fabricados en vidrio y con sistema retrofit que permite la instalación del tubo sin manipular la pantalla y solo cambiando el cebador por el puente suministrado.
- ▶ Manufactured in glass and retrofit system that allows the installation of the tube without manipulating the screen and only changing the primer by the bridge supplied.

YLD-T8IR09-06L

GLASS 20und

AC 180V 240V Hz 50/60

IP 20 CRI(Ra) >80 25.000h ON/OFF x15.000

CE RoHS COMPLIANT TUW Rheinland CERTIFIED

9W 900lm 240°

4000K 6500K PF >0.90

YLD-T8IR18-120L

GLASS 20und

AC 180V 240V Hz 50/60

IP 20 CRI(Ra) >80 25.000h ON/OFF x15.000

CE RoHS COMPLIANT TUW Rheinland CERTIFIED

18W 1800lm 240°

4000K 6500K PF >0.90

YLD-T8IR24-150L

GLASS 20und

AC 180V 240V Hz 50/60

IP 20 CRI(Ra) >80 25.000h ON/OFF x15.000

CE RoHS COMPLIANT TUW Rheinland CERTIFIED

24W 2400lm 240°

4000K 6500K PF >0.90

pantallas LED



- ▶ Pantalla LED de alto rendimiento. Marco de aluminio lacado en blanco
- ▶ High performance LED panel. White aluminum frame



YLD-PL6060

AL 5und

AC 220V 240V Hz 50/60

IP 20 CRI(Ra) >80 25.000h ON/OFF x15.000

CE RoHS COMPLIANT TUW Rheinland CERTIFIED

40W 3200lm 120°

4000K 6000K PF >0.90

Dimensiones
595 x 595 mm



regletas YLD

► Regletas YLD. Un sistema de iluminación práctico y con multiples aplicaciones. Fabricadas en aluminio y equipadas con sensor de presencia. Fácil instalación mediante banda magnetica.

► YLD bars. A practical lighting system with multiple applications. Made of aluminum and equipped with presence sensor. Easy installation by magnetic strip.

regletas USB



► Equipadas con una pequeña bateria interna y sistema de carga mediante USB que le permite una total autonomia.

► Equipped with a small internal battery and charging system USB that allows a total autonomy.

YLD-GY40040-USB

AL 25und

DC 5V Hz 50/60

IP 20 CRI(Ra) >90 25.000h ON/OFF x10.000

CE RoHS COMPLIANT

0.8W lm 56 100°

4000K

Dimensiones
400 x 40 x 17 mm

YLD-GY75040-USB

AL 25und

DC 5V Hz 50/60

IP 20 CRI(Ra) >90 25.000h ON/OFF x10.000


CE RoHS COMPLIANT

1.5W lm 105 100°

4000K

Dimensiones
750 x 40 x 17 mm

regletas serie ZC

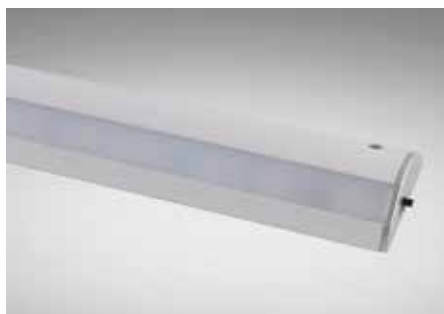

► Conexion a red electrica mediante fuente de alimentacion 12V.

► Connection by power supply 12V.

YLD-GY-40040-ZC

AL 25und

DC 12V Hz 50/60

IP 20 CRI(Ra) >90 25.000h ON/OFF x10.000

CE RoHS COMPLIANT

3W lm 210 100°

4000K

Dimensiones
400 x 40 x 17 mm

YLD-GY-75040-ZC

AL 25und

DC 12V Hz 50/60

IP 20 CRI(Ra) >90 25.000h ON/OFF x10.000

CE RoHS COMPLIANT

6W lm 420 100°

4000K

Dimensiones
750 x 40 x 17 mm

serie Aluminio & PC



► Una solución fácil y eficiente para cocinas, baños y pequeños espacios. Instalación mediante clips y conectables entre sí.

► An easy and efficient solution for kitchens, bathrooms and small spaces. Installation by clips and connectable to each other.

YLD-YG36630-RB

| | | |
|-------------|---------------------------------|-------------------|
| | | DC 12V |
| Hz 50/60 | | IP 65 |
| | CRI(Ra) >90 | |
| | ON/OFF x10.000 | |
| 25.000h | | RoHS COMPLIANT |
| | 6W | lm 420 |
| | | 120° |
| | Dimensiones 366 x 30 x 17 mm | |

YLD-YG76630-RB

| | | |
|-------------|---------------------------------|-------------------|
| | | DC 12V |
| Hz 50/60 | | IP 65 |
| | CRI(Ra) >90 | |
| | ON/OFF x10.000 | |
| 25.000h | | RoHS COMPLIANT |
| | 12W | lm 840 |
| | | 120° |
| | Dimensiones 766 x 30 x 17 mm | |

serie Básica



► Tira de led montada sobre perfil de aluminio para una correcta disipación del calor

► Led strip mounted on aluminum profile for correct heat dissipation.

YLD-YD36616-TM

| | | |
|-------------|-------------------|------------------------------------|
| | | DC 12V |
| Hz 50/60 | | IP 20 |
| | CRI(Ra) >90 | |
| | ON/OFF x15.000 | |
| 25.000h | | RoHS COMPLIANT |
| | 6W | lm 420 |
| | | 120° |
| | | Dimensiones 366 x 16,5 x 6,5 mm |

YLD-YD90016-TM

| | | |
|-------------|-------------------|------------------------------------|
| | | DC 12V |
| Hz 50/60 | | IP 20 |
| | CRI(Ra) >90 | |
| | ON/OFF x15.000 | |
| 25.000h | | RoHS COMPLIANT |
| | 15W | lm 1050 |
| | | 120° |
| | | Dimensiones 900 x 16,5 x 6,5 mm |

tiras LED IP65 clásica



► En bobinas de 50mts y con posibilidad de corte cada metro. Su montaje mediante el kit de conexión le permite adaptarse a la medida necesaria.

► In rolls of 50 mts and with possibility of cutting each meter. Its mounting by means of the connection kit allows it to be adapted to the necessary measure.

SMD2835-60P
230V

| | |
|-----------------------|--------------------|
| | AC 220V 240V |
| Hz 50/60 | |
| | CRI(Ra) >70 |
| | ON/OFF x10.000 |
| 25.000h | |
| | RoHS COMPLIANT |
| | 4,5W |
| | lm/m 180 |
| | 120° |
| | |
| Dimensiones 11 x 6 mm | |

SMD5050-60P
230V

| | |
|-----------------------|--------------------|
| | AC 220V 240V |
| Hz 50/60 | |
| | CRI(Ra) >70 |
| | ON/OFF x10.000 |
| 25.000h | |
| | RoHS COMPLIANT |
| | 8W |
| | lm/m 320 |
| | 120° |
| | |
| | |
| Dimensiones 15 x 8 mm | |

tiras LED IP65 neón



► En bobinas de 50mts y con posibilidad de corte cada metro. Su montaje mediante el kit de conexión le permite adaptarse a la medida necesaria.

► In rolls of 50 mts and with possibility of cutting each meter. Its mounting by means of the connection kit allows it to be adapted to the necessary measure.

SMD2835-60P-NEON
230V

| | |
|-----------------------|--------------------|
| | AC 220V 240V |
| Hz 50/60 | |
| | CRI(Ra) >70 |
| | ON/OFF x10.000 |
| 25.000h | |
| | RoHS COMPLIANT |
| | 4,5W |
| | lm/m 180 |
| | 120° |
| | |
| Dimensiones 11 x 6 mm | |

SMD5050-60P-NEON
230V

| | |
|-----------------------|--------------------|
| | AC 220V 240V |
| Hz 50/60 | |
| | CRI(Ra) >70 |
| | ON/OFF x10.000 |
| 25.000h | |
| | RoHS COMPLIANT |
| | 8W |
| | lm/m 320 |
| | 120° |
| | |
| Dimensiones 15 x 8 mm | |